

SOLAR PRODUCTS





HeliosFuse

Amphenol Technical Products International (ATPI) offers products and solutions for all segments of the solar electric system. ATPI understands the need for efficient (low loss) power transfer, highly reliable, and cost effective solutions that are required to be competitive in this industry. We can provide panel manufactures, installer, and OEM's with connectivity products for both thin film and crystalline silicon technologies.

ATPI's molded in-line fuse, HeliosFuse, provides a quick solution for installing in-line solar fuses. The molded construction provides weather tight housing preventing moisture from getting to the fuse construction. The in-line fuse provides the needed electrical protection to prevent damage to the solar array should a ground fault occur. HeliosFuse is currently offered in our custom wire harnesses.

Amphenol Technical Products International can help you power the planet with the sun. The HeliosFuse is just one of the solar solutions Amphenol Technical Products International has to offer.

HeliosFuse

Features

- 1A to 30A current rating
- 1500V (1000V compatible)
- IP68 protection degree
- Meets UL94-0V0 flammability rating
- UL4248-1 & UL4248-19 recognized
- UL9703 listed
- RETIE compliance




1500V HeliosFuse

Specifications


Description	1500V HeliosFuse
Rated Voltage Fuse	1500V
Rated Current Fuse	2.5A, 3.5A, 4A, 6A, 8A, 10A, 12A, 15A, 20A, 25A, 30A
Connector Options	UL Listed Connectors: H4, H4 Plus, MC4, EVO2, PV4-S1
Cable Size Options	12AWG or 10AWG or 8AWG 2kV PV Wire
Ingress Protection Degree	IP68 (1 Meter, 1 Hour)
Ambient Temperature Range	-40°C to 50°C
Material Safety	RoHS2 Compliant
Flammability Classifications	UL94-V0
Outdoor Suitability	UV Resistance, F1 Rated
Approvals	UL4248-1; UL4248-18 Recognized (File#: E352863) UL9703 Listed (File#: E498904)

1500V 2.5A-4A FUSE




1500V FUSE/4A/12AWG/BLUNT CUT
END TO END CABLE LENGTH 390MM
(PART NUMBER: **2421000**)

1500V 20A FUSE




1500V FUSE/20A/10AWG/BLUNT CUT
END TO END CABLE LENGTH 390MM
(PART NUMBER: **2480000**)

1500V 5A-15A FUSE



1500V FUSE/15A/10AWG/H4 M-F
END TO END CABLE LENGTH 390MM
(456MM REF OVERALL W/CONNECTORS)
(PART NUMBER: **2470020**)

1500V 25A-30A FUSE

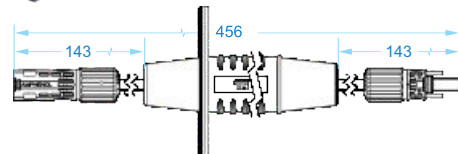

1500V FUSE/30A/10AWG/H4 PLUS M-F
END TO END CABLE LENGTH 390MM
FUSE SPACER INCLUDED
(456MM REF OVERALL W/CONNECTORS)
(PART NUMBER: **24A0050**)

Ordering Information

PRODUCT TYPE		RATED CURRENT		PV WIRE SIZE		END TERMINATION / CONNECTORS		END TO ENDCABLE LENGTH		CUSTOM LENGTH
24	1500V HeliosFuse	0	2.5 A	0	10AWG	00	BLUNT CUT BOTH ENDS	0	STANDARD (390 MM)	
		1	3.5 A			01	BOTH END PRESTRIPPED (8MM, SLUGS ON)			
		2	4 A			02	AMPHENOL H4 MALE TO H4 FEMALE (M-F)			
		3	6 A			03	MULTI CONTACT MC4 MALE TO FEMALE (M-F)			
		4	8 A	1	12AWG	04	MULTI CONTACT EVO2 MALE TO FEMALE	1	CUSTOM	-X (mm)
		5	10 A			05	AMPHENOL H4 PLUS MALE TO FEMALE (M-F)			
		6	12 A			06	TYCO ELECTRONIC PV4-S1 MALE TO FEMALE (M-F) (12AWG/10AWG)			
		7	15 A			07	OTHER CONNECTORS			
		8	20 A	2	8AWG					
		9	25 A							
		A	30 A							

OVERMOLDED SOLAR JUNCTIONS

Amphenol Technical Products International (ATPI) offers products and solutions for all segments of the solar electric system. ATPI understands the need for efficient (low loss) power transfer, highly reliable, and cost effective solutions that are required to be competitive in this industry.


ATPI's overmolded solar junctions provides the ideal low cost, high quality solution for commercial photovoltaic installations. The molded construction provides weather tight housing preventing moisture from getting to the cable joints and provides the needed electrical protection with a rugged design. They can be pre-fabricated with various lengths, number of branches, distance between branches and cable options according to customer specifications.

Amphenol Technical Products International maintains the highest standards for excellence. The 1500V overmolded solar junctions is just one of the cost effective solar solutions Amphenol Technical Products International has to offer.



Features










- 1500V DC Current Rating
- 4AWG, 6AWG, 8AWG, 10AWG, 12AWG, 14AWG cable options for 1500V
- IP68 ingress protection
- Long term UV resistance
- Ready for field assembly
- UL9703 listed & UL6703 approved
- Customer wiring harness services
- RETIE compliance

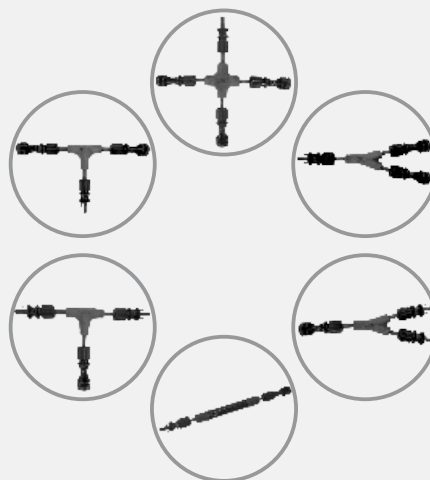

Specification

DC Current Rating	1500V (600V & 1000V Compatible)
Junction Current Rating	65A
Connector Options	H4/MC4/EVO2/H4 PLUS/PV4-S1
Cable Size Options	4AWG, 6AWG, 8AWG, 10AWG, 12AWG
Ingress Protection Degree	IP68 (1m Water/24hours)
Ambient Temperature Range	-40°C to 50°C
Material Safety	RoHS2 Compliant
Flammability Classifications	UL94-V0
Outdoor Suitability	UV Resistance, F1 Rated
Approvals	UL6703; UL4248-1; UL4248-18 Recognized UL9703 Listed


1500V Solar Junction

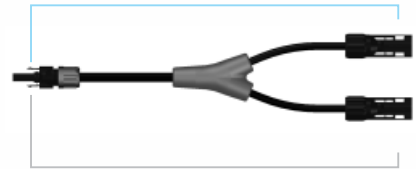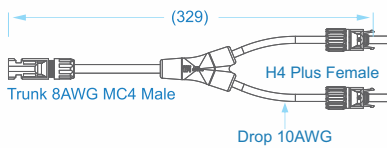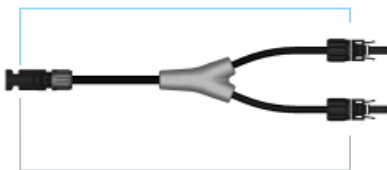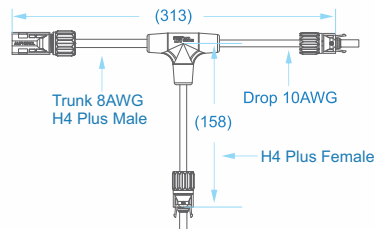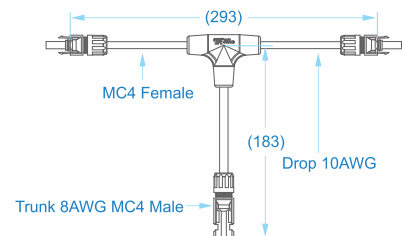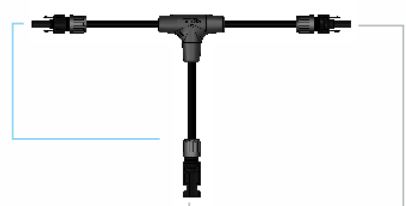X Junction PN: **2211415**Y Junction PN: **2200900**Y Junction PN: **2200815**T1-Top Junction PN: **2221615**T2-Bottom Junction PN: **2230803**

Ordering Information

STANDARD PRODUCT		TYPE		TRUNK SIDE		DROP SIDE	
22	1500V OVERMOLD JUNCTION	0	Y	00	10AWG H4 MALE	00	10AWG H4 MALE
				01	10AWG H4 FEMALE	01	10AWG H4 FEMALE
				02	10AWG MC4 MALE	02	10AWG MC4 MALE
				03	10AWG MC4 FEMALE	03	10AWG MC4 FEMALE
				04	10AWG EVO2 MALE	04	10AWG EVO2 MALE
		1	X	05	10AWG EVO2 FEMALE	05	10AWG EVO2 FEMALE
				06	8AWG H4 MALE	06	8AWG H4 MALE
				07	8AWG H4 FEMALE	07	8AWG H4 FEMALE
				08	8AWG MC4 MALE	08	8AWG MC4 MALE
				09	8AWG MC4 FEMALE	09	8AWG MC4 FEMALE
		2	T1-TOP	10	8AWG EVO2 MALE	10	8AWG EVO2 MALE
				11	8AWG EVO2 FEMALE	11	8AWG EVO2 FEMALE
				12	10AWG BLUNT CUT	12	10AWG BLUNT CUT
				13	8AWG BLUNT CUT	13	8AWG BLUNT CUT
				14	10AWG H4 PLUS MALE	14	10AWG H4 PLUS MALE
		3	T2-BOT	15	10AWG H4 PLUS FEMALE	15	10AWG H4 PLUS FEMALE
				16	8AWG H4 PLUS MALE	16	8AWG H4 PLUS MALE
				17	8AWG H4 PLUS FEMALE	17	8AWG H4 PLUS FEMALE
				18	10AWG PV4-S1 MALE	18	10AWG PV4-S1 MALE
				19	10AWG PV4-S1 FEMALE	19	10AWG PV4-S1 FEMALE
				20	OTHER CONNECTORS	20	OTHER CONNECTORS

1500V Solar Junction

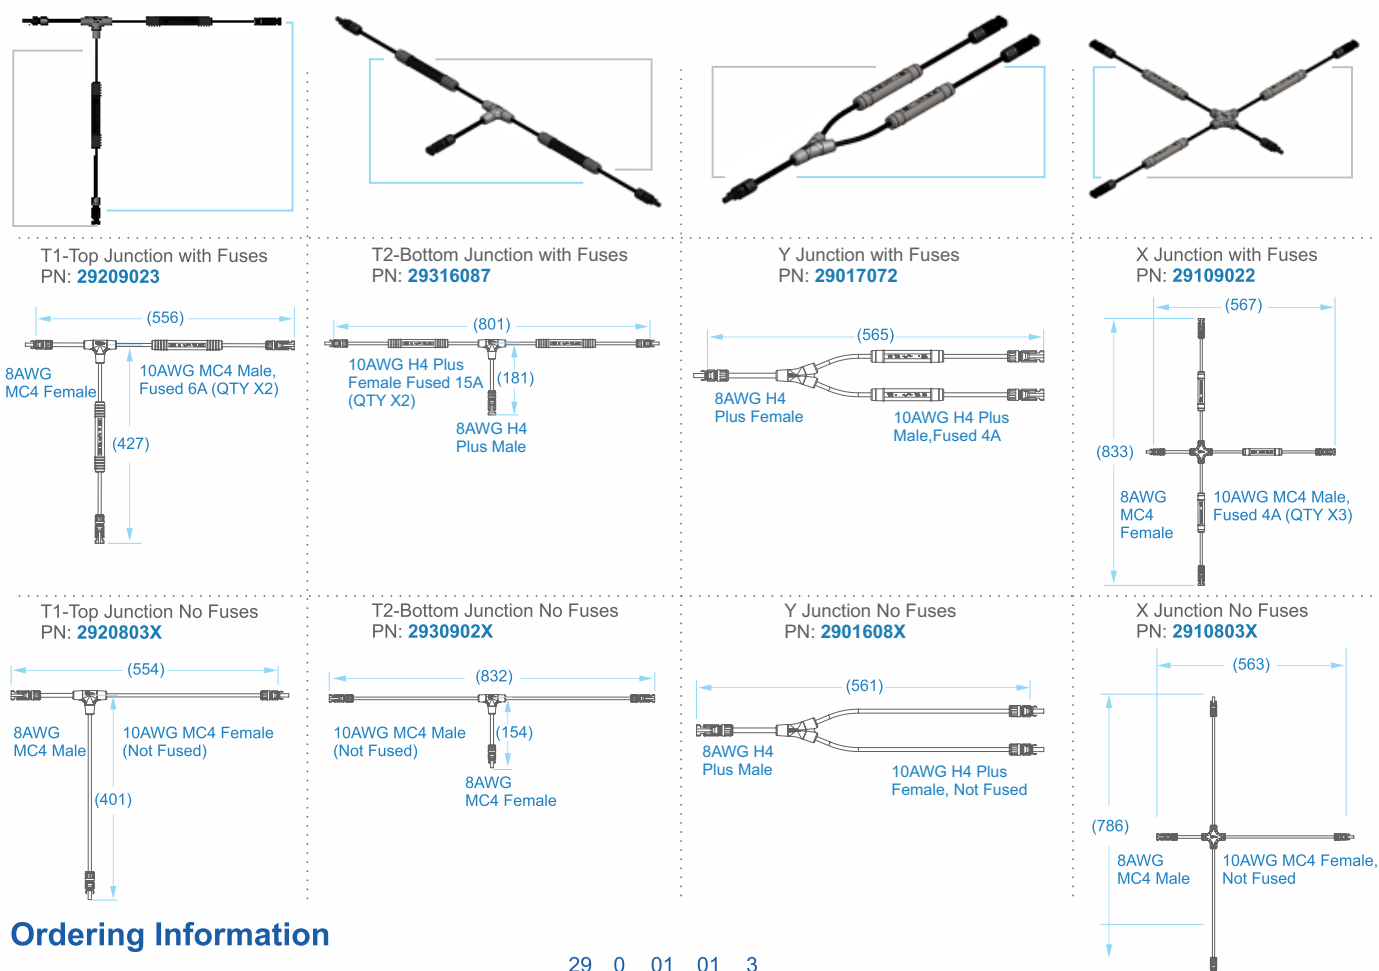

Ordering Information

STANDARD PRODUCT		TYPE	TRUNK SIDE		DROP SIDE		DROP WITH FUSES				
29	1500V OVERMOLD JUNCTION	0	Y	00	10AWG H4 MALE	00	10AWG H4 MALE	0	FUSED (2.5A)		
				01	10AWG H4 FEMALE						
				02	10AWG MC4 MALE			01	10AWG H4 FEMALE	1	FUSED (3.5A)
				03	10AWG MC4 FEMALE						
				04	10AWG EVO2 MALE					02	10AWG MC4 MALE
		05	10AWG EVO2 FEMALE								
		1	X	06	8AWG H4 MALE	03	10AWG MC4 FEMALE	3	FUSED (6A)		
				07	8AWG H4 FEMALE						
				08	8AWG MC4 MALE			04	10AWG EVO2 MALE	4	FUSED (8A)
				09	8AWG MC4 FEMALE						
				10	8AWG EVO2 MALE					05	10AWG EVO2 FEMALE
		11	8AWG EVO2 FEMALE								
		2	T1-TOP	12	10AWG BLUNT CUT	06	10AWG BLUNT CUT	6	FUSED (12A)		
				13	8AWG BLUNT CUT						
				14	10AWG H4 PLUS MALE			07	10AWG H4 PLUS MALE	7	FUSED (15A)
				15	10AWG H4 PLUS FEMALE						
				16	8AWG H4 PLUS MALE					08	10AWG H4 PLUS FEMALE
		17	8AWG H4 PLUS FEMALE								
		3	T2-BOT	18	10AWG PV4-S1 MALE	09	10AWG PV4-S1 MALE	9	FUSED (25A)		
				19	10AWG PV4-S1 FEMALE						
				20	OTHER CONNECTORS			10	10AWG PV4-S1 FEMALE	A	FUSED (30A)
				11	OTHER CONNECTORS	X	NO FUSE				

BALANCE OF SYSTEM (BOS) SOLUTION FOR PV WIRING HARNESSES

Solar projects require custom wire harness solutions. Amphenol TPI developed and certified a configurable product line to fit your project requirements and specifications.

Certifications

- UL9703 Listed Product
- UL4703 PV Wire
- UL4248 Overmolded Fuse
- UL6703 Connectors


Quality Inspection

- 100% Electrically Tested Point to Point
- Ensuring Each Harness is Defect Free
- Visual Inspection, Continuity Test, Resistance Check, Water Leakage test


APPLICATION EXAMPLE

Cable Harness Assemblies for Solar Panels


POSITIVE 3 STRING HARNESS

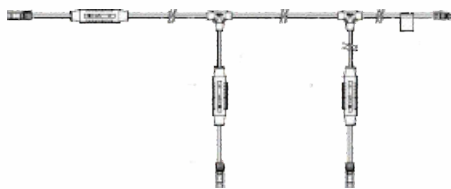

NEGATIVE 3 STRING HARNESS

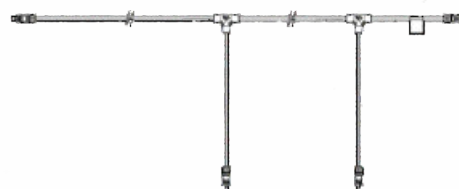

SERIES 4: 8 STRING HARNESSES




SERIES 6: 6 STRING HARNESSES



POSITIVE 13 STRING HARNESS



NEGATIVE 13 STRING HARNESS

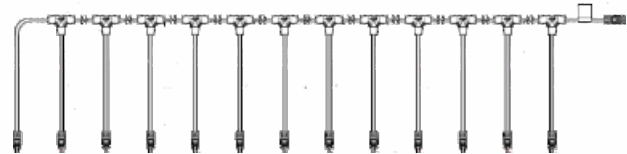

CUSTOM HARNESSES

For custom solar wire harnesses for your project requirements, please contact ATPI's solar products team by referring to the contact Information section below.

CONTACT INFORMATION:

For further information on your individual application requirements or inquiries, please contact ATPI's solar products team:


North America

Winnipeg, Manitoba, Canada
Telephone +1 204 697-2222
Address: 2110 Notre Dame Avenue


Email solar@tpil.com
Websites www.amphenol-industrial.com
www.tpil.com
<https://downloads.tpil.com/> (Contact us for login information)

PRODUCT GALLERY

**1500V OVERMOLDED
T-JUNCTION**

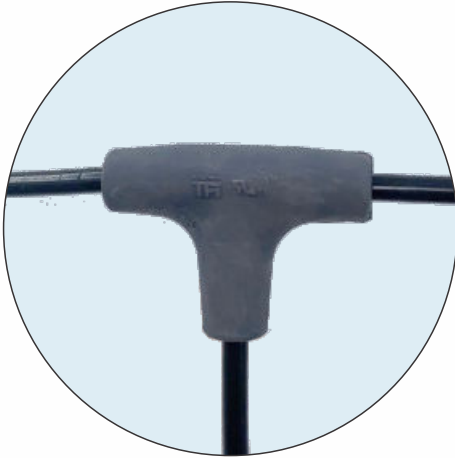


**1500V OVERMOLDED
5A FUSE**

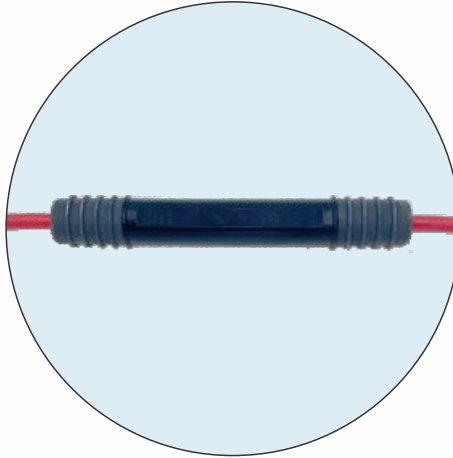


**1500V OVERMOLDED
BIG T-JUNCTION**




**1500V OVERMOLDED
Y-JUNCTION**

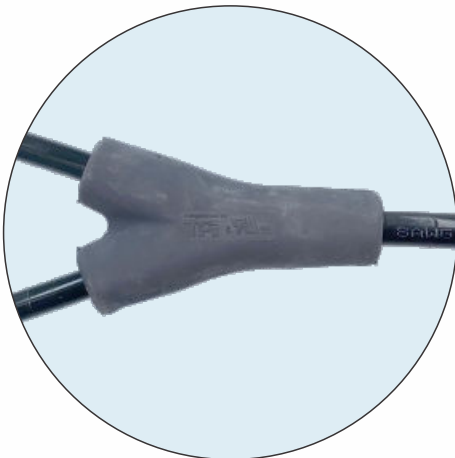


**1500V OVERMOLDED
30A FUSE**

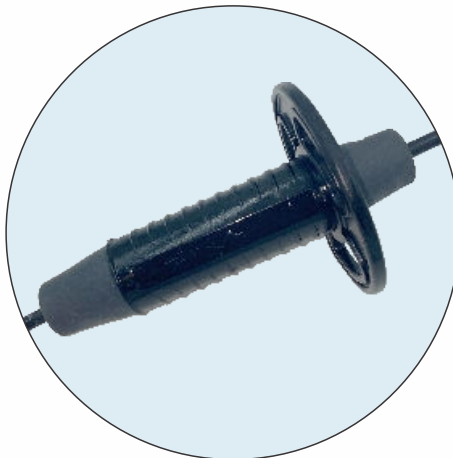


**1500V IN-LINE
OVERMOLD**

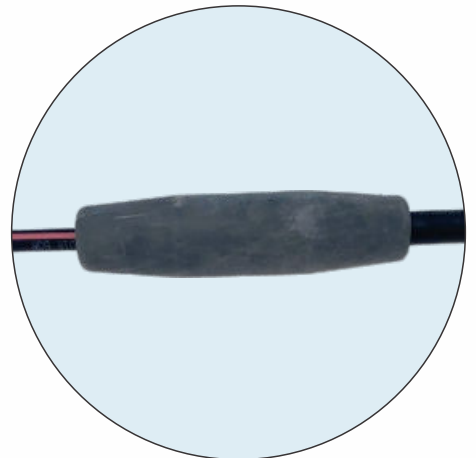


**1500V OVERMOLDED
3:2 STARR JUNCTION**

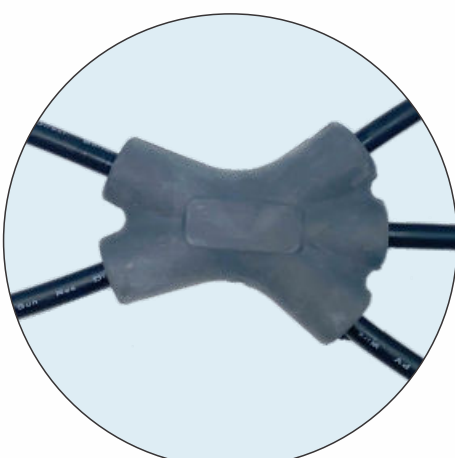

**1500V OVERMOLDED
4A FUSE**

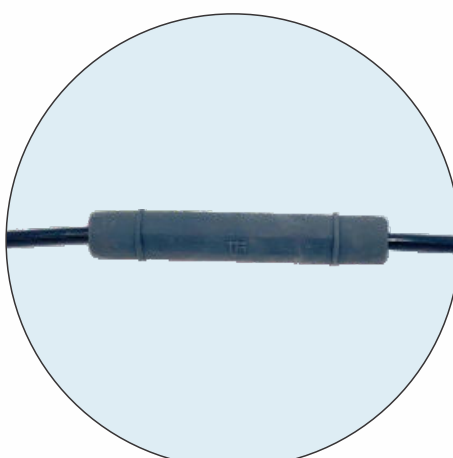


**1500V OVERMOLDED
X-JUNCTION**

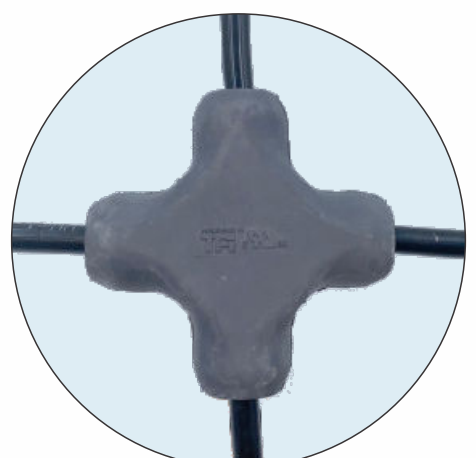



Amphenol Technical Products International

- Winnipeg, Manitoba, Canada
Telephone: +1 204 697 2222
Address: 2110 Notre Dame Avenue
.....
- Nogales, AZ, USA
Telephone: +1 520-397-70-00
Address: 482 Mariposa Road Building A, 85621
.....
- ChangZhou, China
Telephone: +86 519 8981 9713
Address: No.11 Fengxiang Road, New District, Changzhou, Jiangsu, China



INDUSTRIAL@AMPHENOL
TRUSTED GLOBALLY